
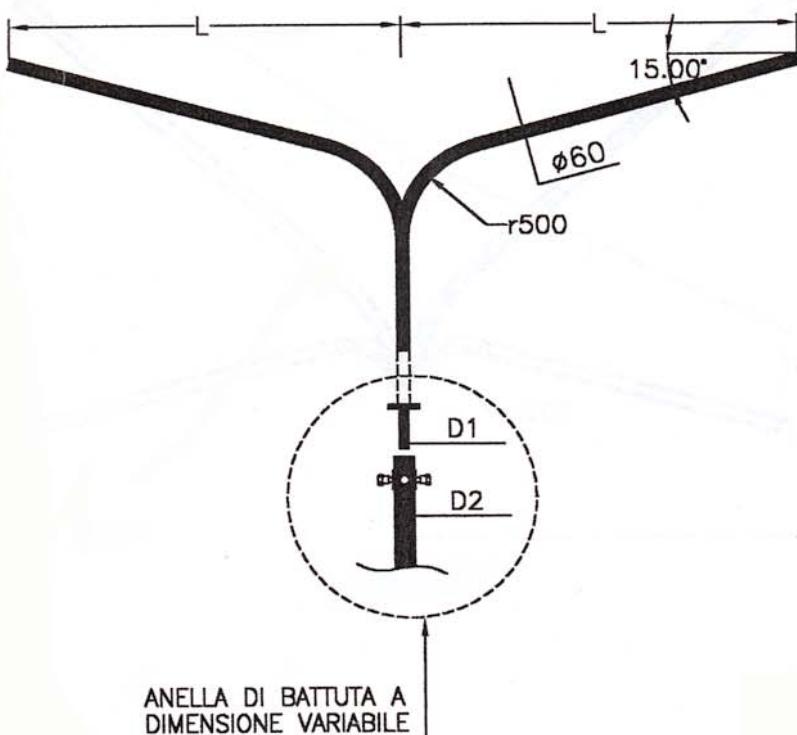


Sbracci semplici curvati R=500mm

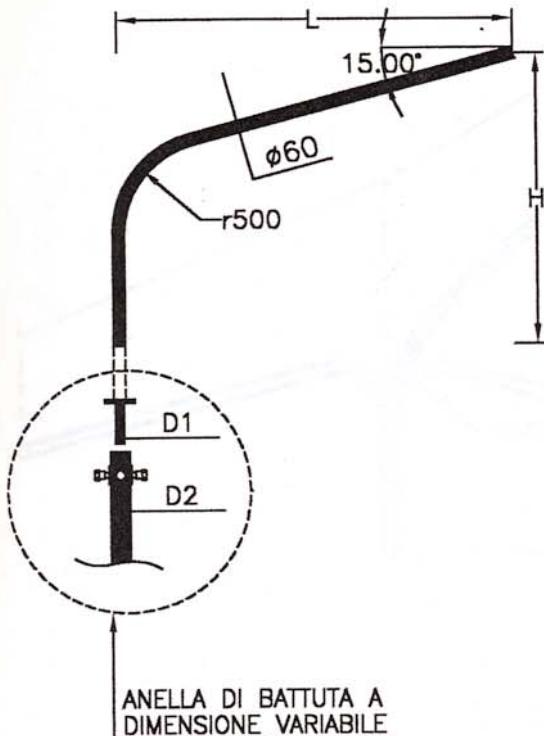

L H P

ART.

ART.	mm.	mm.	Kg
PS100	1000	1000	9,6
PS101	1500	1000	11,4
PS102	2000	1000	13,1
PS103	2500	1000	14,9
PS104	1000	1500	11,9
PS105	1500	1500	13,7
PS106	2000	1500	15,5
PS107	2500	1500	17,2
PS108	1000	2000	14,2
PS109	1500	2000	16,0
PS110	2000	2000	17,8
PS111	2500	2000	19,5

Sbracci singoli con anella di battuta

L H P

ART.

ART.	mm.	mm.	Kg
PS200	1000	1000	19,7
PS201	1500	1000	22,8
PS202	2000	1000	26,2
PS203	2500	1000	29,8
PS204	1000	1500	23,8
PS205	1500	1500	27,4
PS206	2000	1500	31,0
PS207	2500	1500	34,4
PS208	1000	2000	28,4
PS209	1500	2000	32,0
PS210	2000	2000	35,6
PS211	2500	2000	39,0

Sbracci doppi a 180° con anella di battuta

Note: dimensioni standard anella di battuta
d1 – Diametro di innesto 48 mm
d2 – Diametro sommità palo 60 mm

