



Sbracci semplici curvati R=500mm

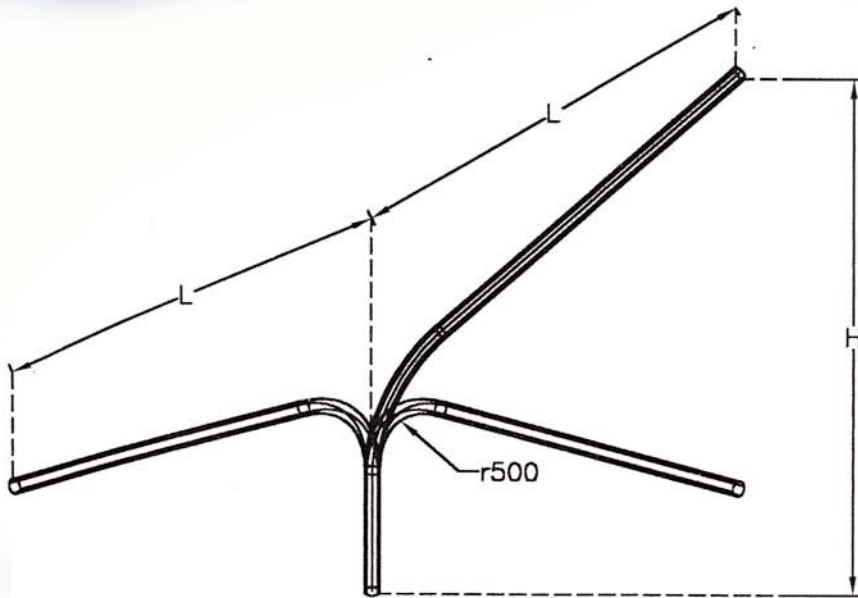

ART.	L	H	P
	mm.	mm.	Kg
PS300	1000	1000	27.50
PS301	1500	1000	33.50
PS302	2000	1000	39.80
PS303	2500	1000	42.00
PS304	1000	1500	35.00
PS305	1500	1500	41.00
PS306	2000	1500	44.00
PS307	2500	1500	49.00
PS308	1000	2000	42.00
PS309	1500	2000	48.00
PS310	2000	2000	51.00
PS311	2500	2000	57.00

Sbracci tripli con anella di battuta

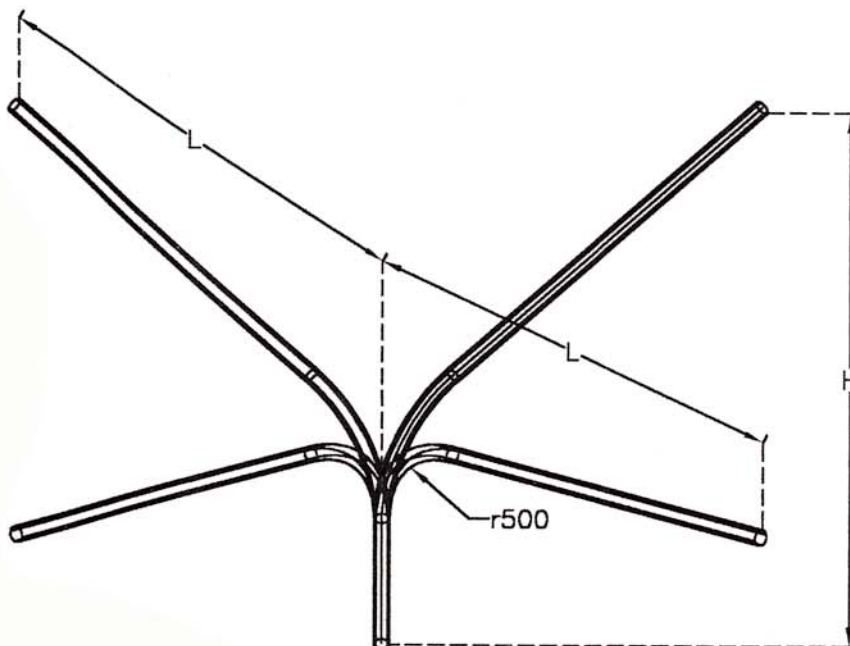

ART.	L	H	P
	mm.	mm.	Kg
PS400	1000	1000	37.50
PS401	1500	1000	43.50
PS402	2000	1000	51.00
PS403	2500	1000	59.00
PS404	1000	1500	46.00
PS405	1500	1500	54.000
PS406	2000	1500	61.00
PS407	2500	1500	68.00
PS408	1000	2000	46.00
PS409	1500	2000	64.00
PS410	2000	2000	70.00
PS411	2500	2000	78.00

Sbracci quadrupli con anella di battuta

Note: dimensioni standard anella di battuta
 d1 - Diametro di innesto 60 mm
 d2 - Diametro sommita' palo 70 mm

