



Sbracci semplici curvati R=1000 mm

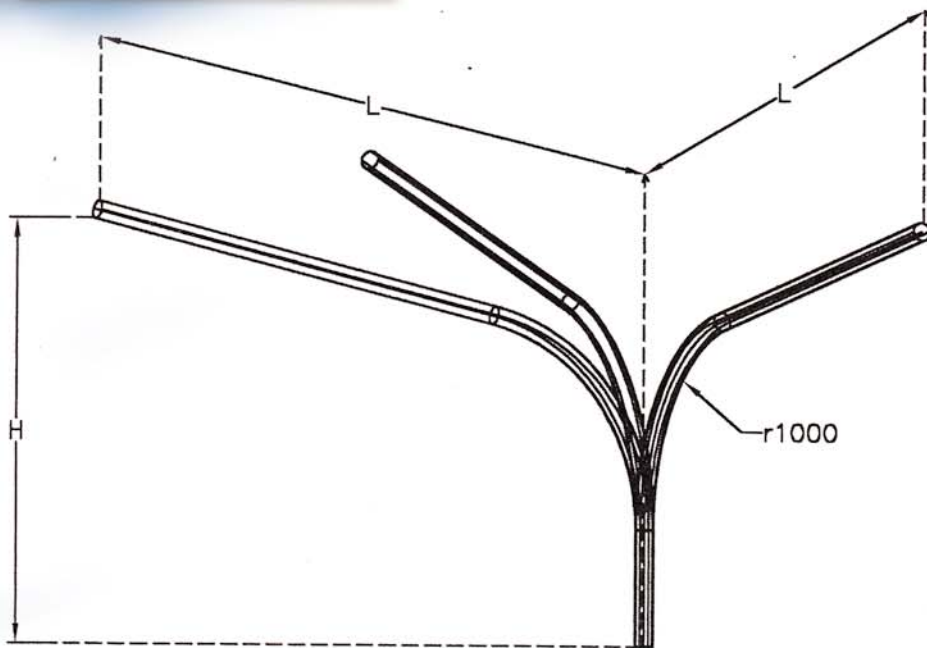

ART.	L	H	P
	mm.	mm.	Kg
1PS300	1500	1500	41.00
1PS301	2000	1500	43.50
1PS302	2500	1500	48.50
1PS303	1500	2000	48.50
1PS304	2000	2000	51.00
1PS305	2500	2000	57.00

Sbracci tripli con anella di battuta

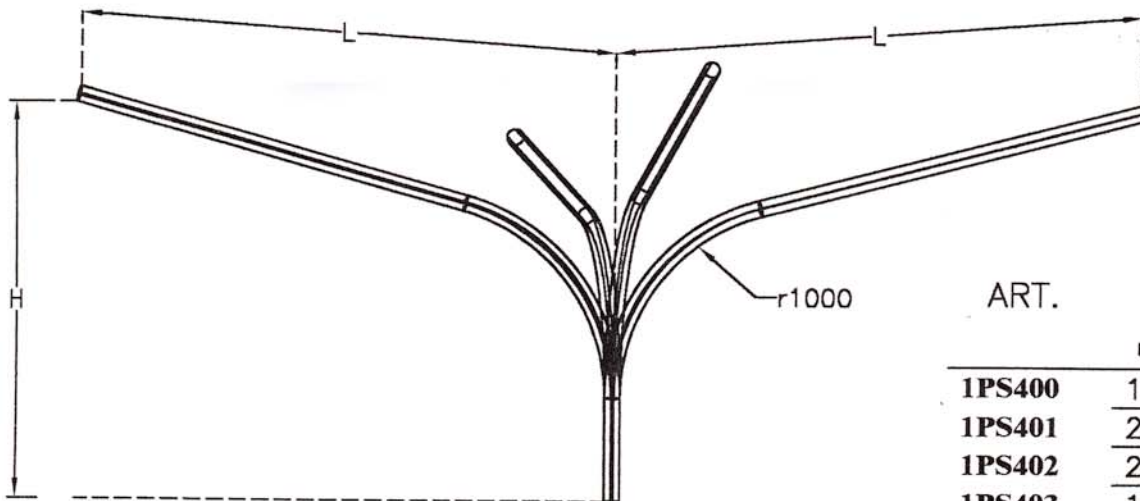

ART.	L	H	P
	mm.	mm.	Kg
1PS400	1500	1500	54.00
1PS401	2000	1500	59.50
1PS402	2500	1500	66.00
1PS403	1500	2000	62.00
1PS404	2000	2000	68.00
1PS405	2500	2000	76.00

Sbracci quadrupli con anella di battuta

Note: dimensioni standard anella di battuta
 d1 - Diametro di innesto 60 mm
 d2 - Diametro sommita' palo 70 mm